



Institut für
Europäische
Ethnologie

Installation instruction for the printer Canon 4945 for MacOS

Table of Contents

01 [Quick Guide](#)

02 [Step-by-Step Instructions with Images](#)

05 [Enable Secure Print](#)

Quick Guide

- On the [Canon website](#), select your version of **MacOS** as the operating system and download the driver **UFR II/URFII LT Printer Driver & Utilities for Mac**.
- Run the downloaded file and follow the instructions to install the driver.
- In your Mac **System Settings** select **Printers & Scanners** and then **Add Printer, Scanner or Fax...**
- Choose **IP** as the installation method and enter as **Address** 172.18.14.120
- For Protocol select **Line Printer Daemon – LPD**.
- Choose a name and location for the printer e. g. **Canon 4945 & 2nd floor**
- Under **Use** select **Select Software...**, search for 4945 and select **Canon iR-ADV 4945**
- To use *Secure Print*, go to the printer settings in the software you print in, e. g. Adobe. Select **Printer...** and under **Printer Options** select **Special Features**
- In the drop-down menu under **Job Processing** select *Secured Print*. After you click **OK** and **Print** enter a document name, user name and the PIN.
- At the printer, select your print job in the Print menu and start it by entering your PIN

[Table of Contents](#)

Step-by-Step Instructions with Images

Select the version of your MacOS



Treiber (4)

Für bestimmte Produkte ist ein Treiber erforderlich, um die Verbindung zwischen Ihrem Produkt und einem Computer zu aktivieren. Auf dieser Registerkarte finden Sie die entsprechenden Treiber für Ihr Produkt. Falls kein passender Treiber verfügbar ist, finden Sie dort eine Erläuterung zur Kompatibilität Ihres Produkts mit dem jeweiligen Betriebssystem.

Hilfreiche Informationen: Verwenden Sie die obigen Registerkarten, um auf Software, Handbücher und andere Inhalte zuzugreifen.

Ihr Betriebssystem

macOS 15 (Sequoia) ▾

Download the **UFR II/URFII LT Printer Driver & Utilities for Mac**. Run the downloaded file and follow the instructions to install the driver

UFR II/URFII LT Printer Driver & Utilities for Mac V10.19.21 [macOS 10.15.7 - macOS 15.5]

Dateiversion: V10.19.21 | Veröffentlichungsdatum: 06 Juni 2025

Betriebssystem(e)

macOS 15 (Sequoia)
macOS 11 (Big Sur)

macOS 14 (Sonoma)
macOS 10.15 (Catalina)

macOS 13 (Ventura)

macOS 12 (Monterey)

Sprache(n)

English
Deutsch
한국어

Français
Nederlands
繁體中文

Español
Türkçe
简体中文

Italiano
日本語


[Weitere Informationen](#) ➤

[E-Mail-Link](#) ➤


[DOWNLOAD](#)

[Table of Contents](#)

In your Mac **System Settings** select **Printers & Scanners** and then **Add Printer, Scanner or Fax...**

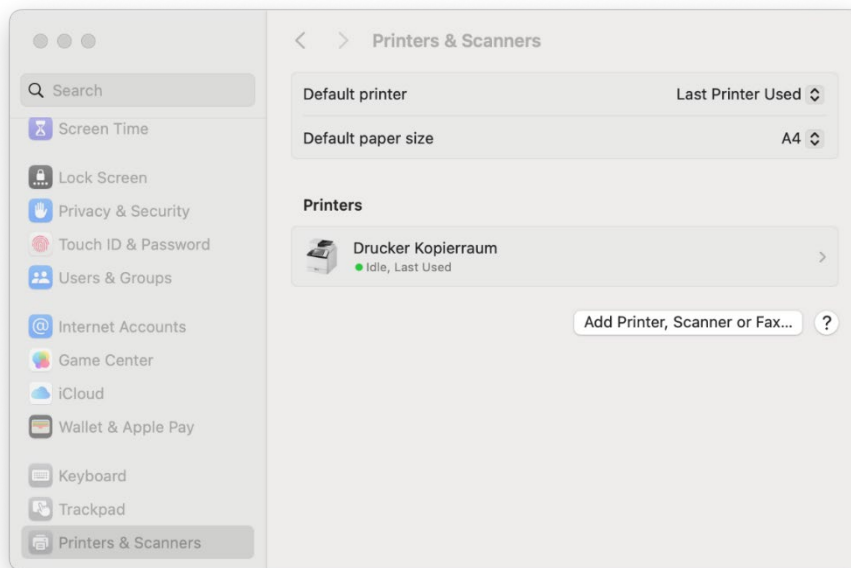


Choose **IP** as the installation method and enter **172.18.14.120** as the **Address**. For Protocol select **Line Printer Daemon – LPD**. Choose a name and location for the printer e. g. **Canon 4945 & 2nd floor**.

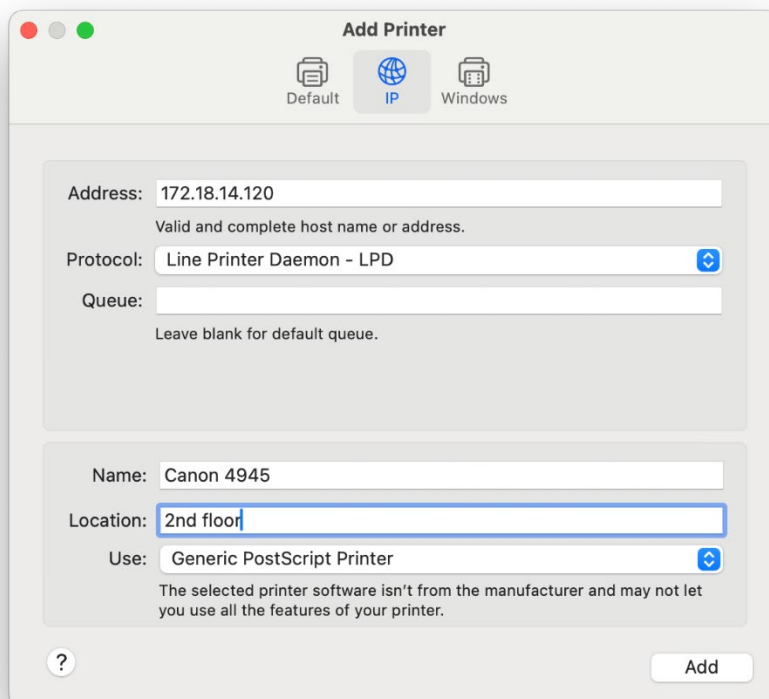


[Table of Contents](#)

Under **Use** select **Select Software....**

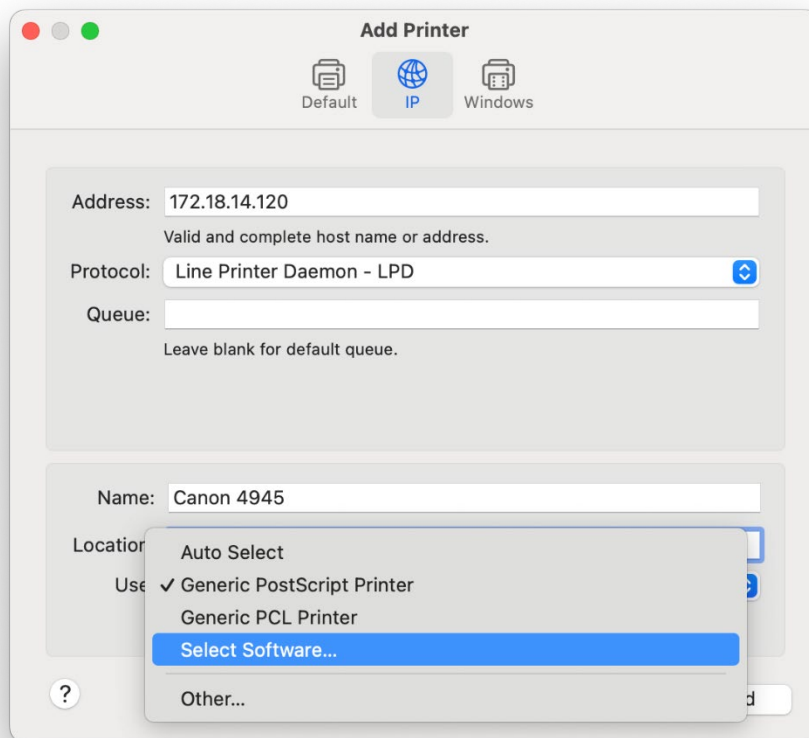


Search for *4945* and select **Canon iR-ADV 4945**.

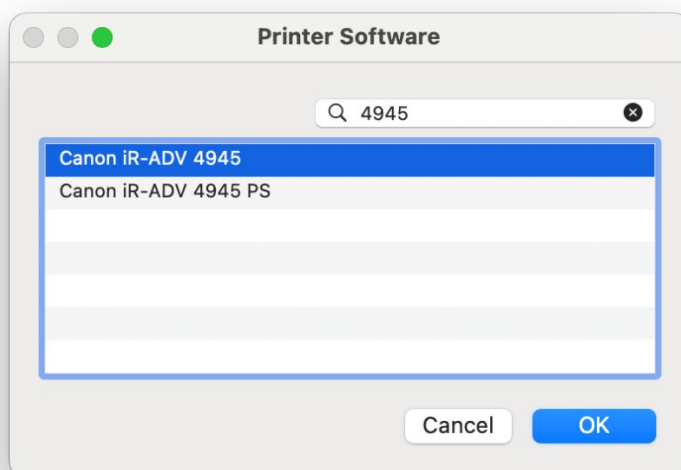


[Table of Contents](#)

Enable Secure Print


To use *Secure Print*, go to the printer settings in the software you want to print in, e.g. Adobe. Select **Printer...**

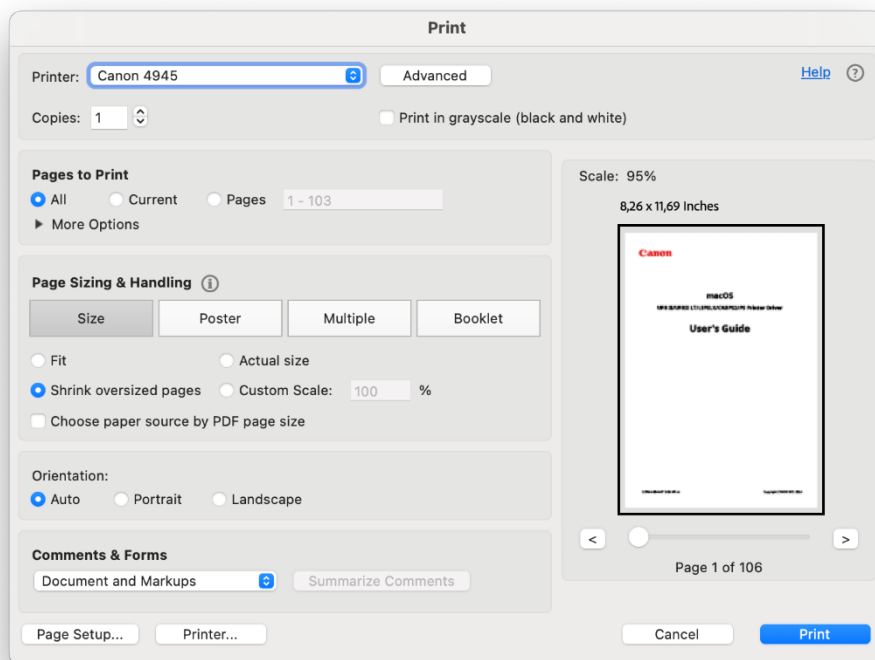

Under **Printer Options** click on **Special Features**

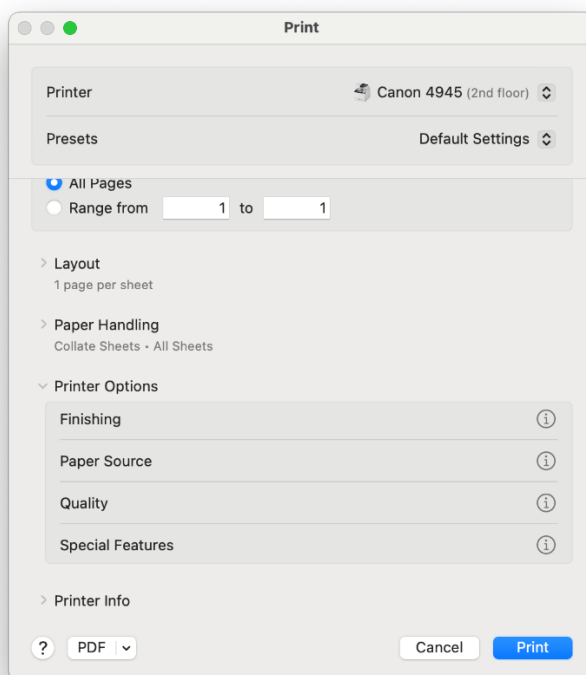

In the drop-down menu under **Job Processing**: select *Secured Print*.

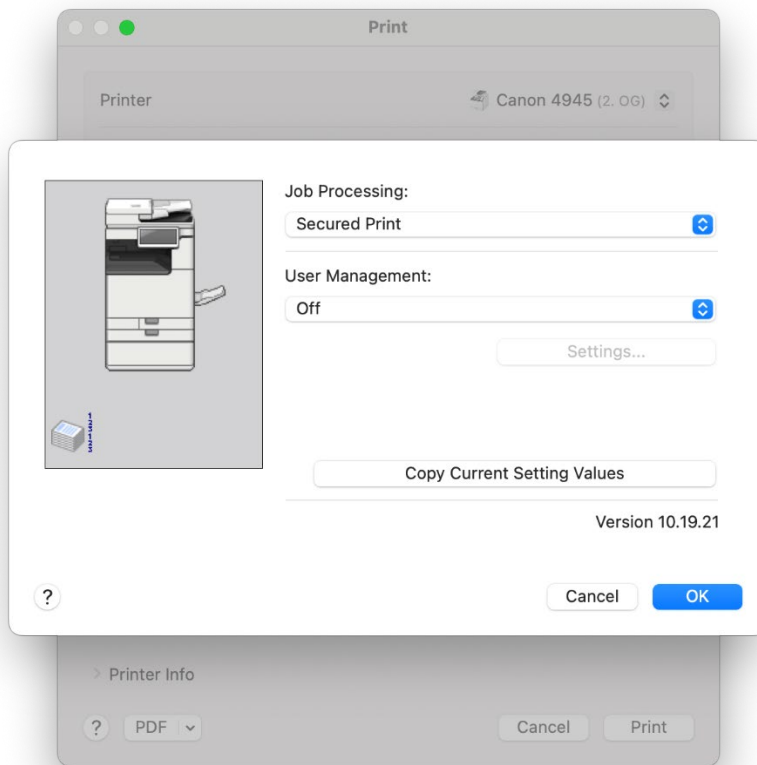


After you click **OK** and **Print** enter a document name, user name and the PIN.

Note: The document will not be printed after you click **OK**. Only after you click **Print** in the next Window.

A screenshot of the 'Secured Print' dialog box. The title bar says 'Secured Print'. The main text says 'Document will be printed in the Secured Print mode.' and 'Set the document name, user name, and PIN.' Below this are three input fields: 'Document Name:' (with a note '(Max. 32 bytes)'), 'User Name:' (with a note '(Max. 32 bytes)' and a blue border around the field), and 'PIN:' (with a note '(1 to 9999999)'). At the bottom right are 'Cancel' and 'OK' buttons.

[Table of Contents](#)

At the printer select your print job in the print menu and start it by entering your PIN

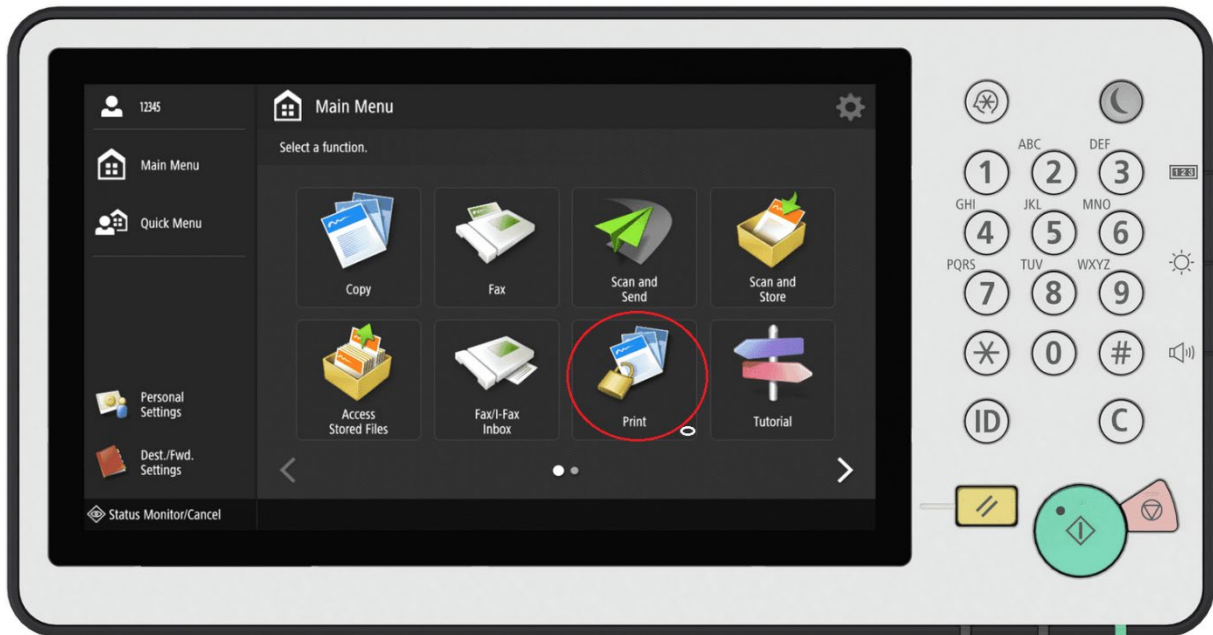

[Table of Contents](#)